



Icer-Ette



Experience maritime excellence with the Model-88 Ice Maker. Brave unforgiving seas with robust marine-grade design. Prioritize safety with a secure latch. Revel in luxury with up to 21 lbs of ice daily. Be an environmental hero with eco-friendly refrigerant. Embrace legacy, choose excellence.

Why Choose the Model 88 Icer-Ette?

- ⚓ **Efficiency that Counts:** With minimal water usage, the Model 88 produces ice efficiently – just 2¾ gallons per day – ideal for your long sea journeys.
- ⚓ **Built to Endure:** Designed for the toughest marine conditions, our Model 88 boasts marine-grade hardware and a robust build, a true match for the daring Explorer in you.
- ⚓ **Control in Any Situation:** The built-in door prop empowers your adaptability, allowing manual defrosting or air drying to remain in control no matter what.
- ⚓ **Luxurious Convenience:** Offering up to 21 lbs of ice daily and storing 11 lbs, the Model 88 indulges your love for luxury, ensuring you're always ready for any water-bound occasion.
- ⚓ **Eco-Friendly:** Embrace the environment – the Model 88's R600a refrigerant reflects conscious choices, aligning with your eco-conscious priorities.

Raritan products are chosen by powerboat, sailboat, houseboat and RV owners and manufacturers the world over for their dependability, environmental responsibility, simplicity of installation, operation and maintenance. The product line includes house-hold style toilets, marine toilets, marine sanitation devices and systems, cleaning products, icemakers, water heaters and rudder angle indicators.

Part Numbers

Built in and Freestanding Units

88B515-1 115V


88B515-2 230V

Flush Mount Units


88F515-1 115V

88F515-2 for 230V

Model 88 with Flush Mount Flange

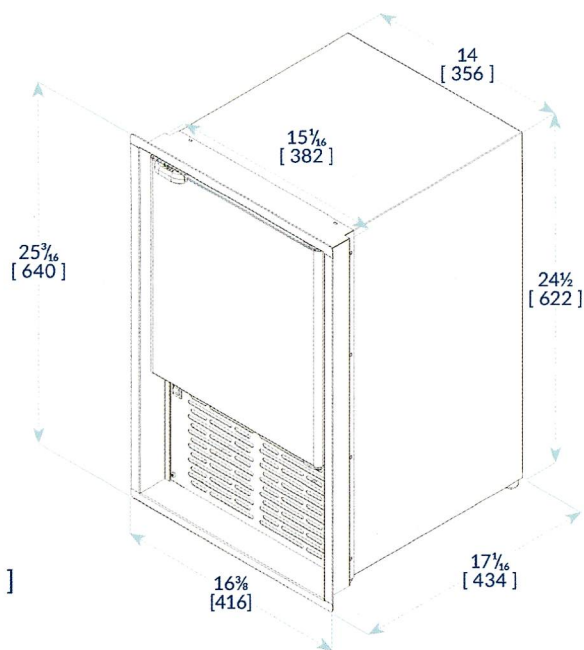

Model 88 with Built In Flange

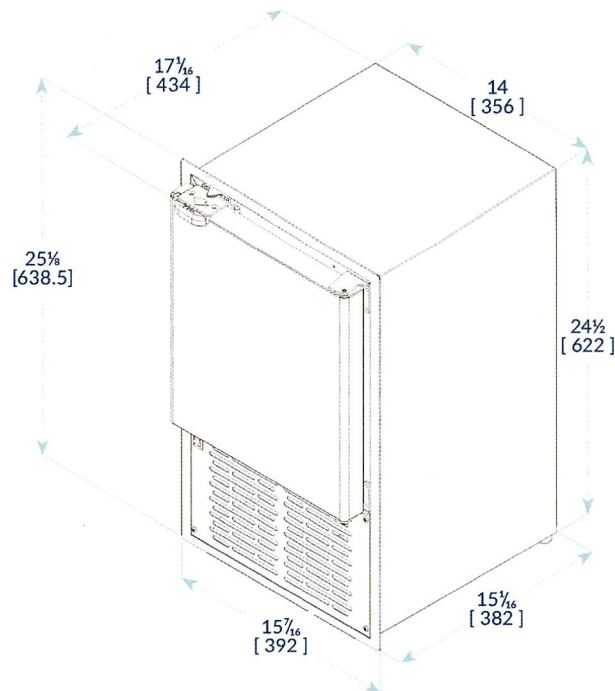

Dimensions

Inches [MM]

Specifications

Electrical Requirements

115V / 60Hz with USA plug

230V / 50Hz with Euro plug

Volt Range

104V-127V

220V-240V

Maximum Amp Fuse

12 amps

10 amps

- ⚓ Water pressure operating range 20-120
- ⚓ All ventilation from front, limited vent in back unit. No additional clearance required around the sides
- ⚓ Adjustable rubber leveling feet

- ⚓ Water supply inlet size 1/4" OD requires 3/4" space behind the unit for clearance
- ⚓ Water supply inlet located in lower right of rear opposite of the power cord
- ⚓ Net weight 51 lbs / 23 KG



For more information contact:
Raritan Engineering Company
530 Orange Street
Millville, NJ 08332

E-Mail..... info@raritaneng.com
Telephone: ... 856-825-4900
Toll Free: 800-352-5630
Fax: 856-825-4409