




FRESH HEAD

Tired of the rotten egg smell or using your shower head to flush the toilet?



Enhance your boating experience with the Fresh Head Manual Marine Toilet. You will appreciate the innovative pressurized fresh water connection with easy, hygienic bowl emptying, adding personalized comfort through pre-wetting. You will recognize the technical excellence of the diaphragm pump and rely on secure, reliable performance.

Lock Feature Prevents Potential Backflow and Flooding

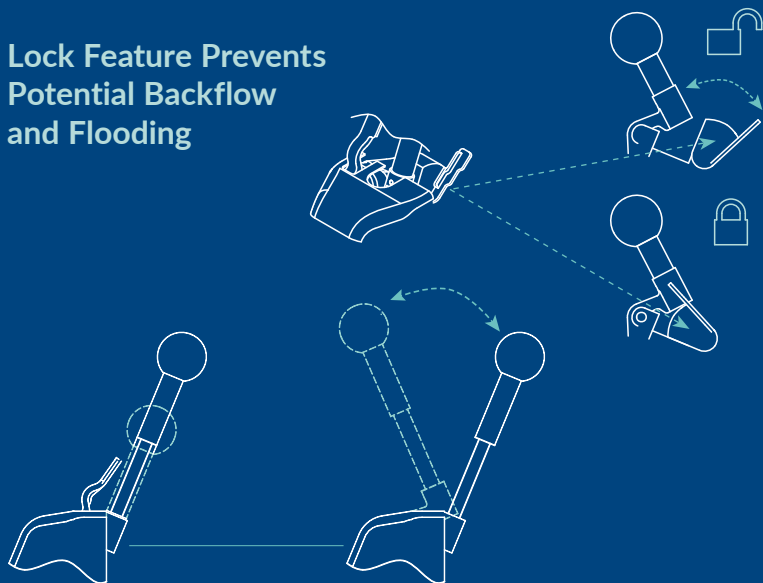

Freshen Your Boating Experience with the Fresh Head Manual Marine Toilet

- ↓ **Revolutionary Connection:** The first manual marine toilet to utilize pressurized fresh water — eliminates calcium deposits in the discharge hose.
- ↓ **Hygienic Efficiency:** The diaphragm pump ensures effortless bowl emptying, prioritizing crew health.
- ↓ **Personalized Wetting:** Pre-wet the bowl to your preference for tailored comfort.
- ↓ **Effortless Flushing:** Telescopic handle guarantees easy operation, maximizing your enjoyment.
- ↓ **Technical Precision:** Diaphragm pump and valve mechanics offer unrivaled engineering excellence.
- ↓ **Unyielding Dependability:** Trust the locking feature and full-size joker valve for smooth operation.
- ↓ **Easy Installation:** Footprint is a direct replacement for competitive models.

Raritan products are chosen by powerboat, sailboat, houseboat and RV owners and manufacturers the world over for their dependability, environmental responsibility, simplicity of installation, operation and maintenance. The product line includes house-hold style toilets, marine toilets, marine sanitation devices and systems, cleaning products, icemakers, water heaters and rudder angle indicators.



Part Numbers	
25M00	Marine size fresh head manual toilet
25H00	Household size fresh head manual toilet
25M00L	Marine size fresh head manual toilet, left hand operation
25H00L	Household size fresh head manual toilet, left hand operation

Dimensions


Inches [MM]

Note

- ⚓ The seat will open within the depth of the bowl [D], however it may be desirable to increase this angle by allowing more room at the back of the bowl for the seat to open.

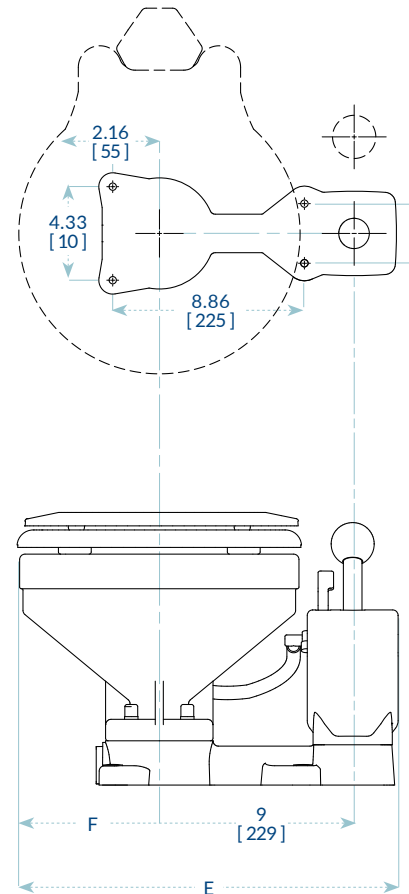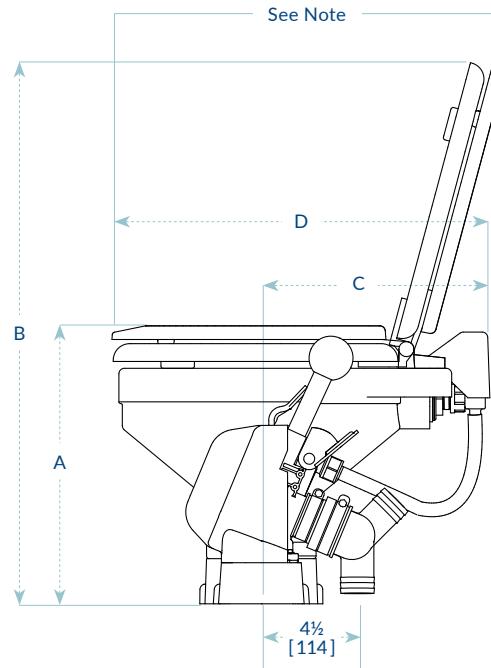

Typical Plumbing

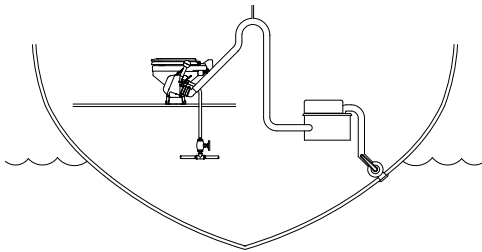

Bowl Type	A	B	C	D	E	F
Marine	13 [330]	24 3/4 [629]	10 3/8 [264]	17 1/4 [438]	17 3/4 [451]	6 1/2 [165]
Household	13 3/8 [334]	27 7/8 [708]	11 1/2 [292]	20 [508]	18 3/4 [464]	7 [179]

Specifications		
Rinse Water For Inlet	Discharge	Average Water Consumption Per Use
1/2" FPT	1 1/2" Hose	1 Pint (47L) For Liquid
Maximum Pressure 150 PSI (10 bar)	Maximum Height 15 feet (4.5 meter)	3/4 G (2.8L) For Solid Use
Minimum pressure 3 GPM (11.3 L/min @ 10 PSI (0.7 bar)		



For more information contact:
Raritan Engineering Company
530 Orange Street
Millville, NJ 08332

E-Mail..... info@raritaneng.com
Telephone:.... 856-825-4900
Toll Free: 800-352-5630
Fax: 856-825-4409